

MODEL AND SIGNIFICANCE

S	L7N	-	63	C32	/2P	II	G	MX+OFI
Suntree code	Design number		Frame size	Rated current	Poles	Rated voltage	Wiring method	Accessories and voltage


DESIGN NUMBER

- DC non-polarized
- Low temperature rise
- V0 (UL94) flame-retardant materials used for the case
- All current-carrying parts are copper
- ROHS compliant
- Versatile accessory options
- Instrumentation parts are all made of stainless steel

FUNCTION AND SCOPE OF APPLICATION


SL7N-63 series PV miniature circuit breaker is a current-limiting circuit breaker with overload and short circuit protection, overload and short circuit protection for DC systems with voltage DC1200V and below. Widely used in DC panels, DC distribution cabinets, DC convergence boxes, distribution box systems for energy storage, PV and wind power stations, and communication distribution box protection systems. It can also be used for infrequent on/off conversion of lines under normal conditions.

MOUNTING DIMENSIONS

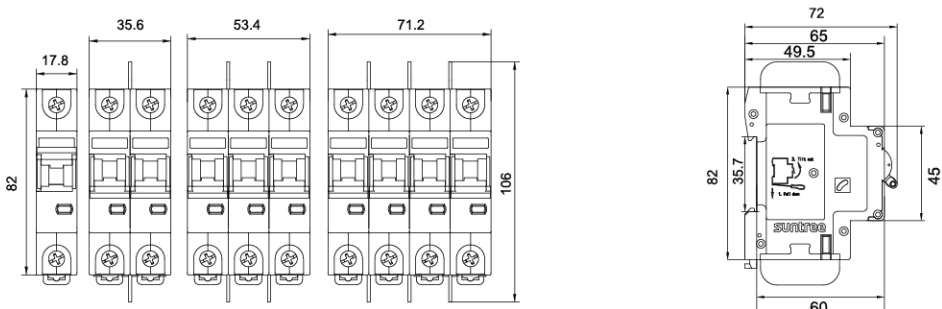

DC CIRCUIT BREAKER

- SL7N-63/1P
- SL7N-63/2P
- SL7N-63/3P
- SL7N-63/4P

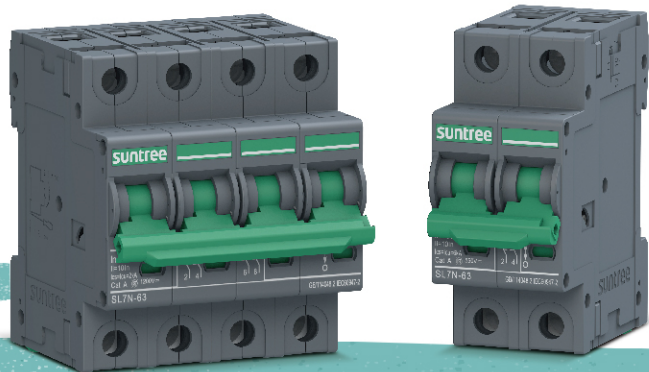

PRODUCT MODEL

Model	Appearance	Characteristic	Current A	Voltage V	Wiring Method	Optional accessories	Accessory name	Accessory name
SL7N-63	1P	B/C	6	I:15	-	-	OF 20F SD OF+SD	-
SL7N-63	1P			II:24	-			
SL7N-63	1P			III:48	-			
SL7N-63	1P			IV:60	-			
SL7N-63	1P			V:100				
SL7N-63	1P			VI:180	H			
SL7N-63	1P		10	Default:250	H			
SL7N-63	2P		16	II:24	H		MX MX+OF OF+MX+OF 20F+MX+OF SD+MX+OF OF+SD+MX OF+SD+MX+OF	I:DC12V II:DC24V-48V III:DC110V-400V IV:AC220V-380V
SL7N-63	2P		20	III:48	H			
SL7N-63	2P		25	IV:125	H			
SL7N-63	2P		32	V:375	G			
SL7N-63	2P		40	Default:500	G			
SL7N-63	2P		50	VI:550	G			
SL7N-63	2P		63	VII:600	G			
SL7N-63	2P			VIII:800	G			
SL7N-63	3P			Default:750	H			
SL7N-63	3P			I:900	H			
SL7N-63	4P			Default:1000	G		OF+MN SD+MN OF+SD+MN	AC230V AC400V
SL7N-63	4P			I:1200	G			



INSTALLATION PRECAUTIONS

- In a medium without explosion risk and free of gases and dust(including conductive dust) sufficient to corrode metal and destroy insulation
- In the condition with no snow erosion
- It can be installed horizontally and vertically
- The magnetic field of the installation position shall not exceed 5 times the geomagnetic field in any direction;
- It should not be installed in flammable and explosive places
- There should be no significant impact and vibration at the installation place

MAIN TECHNICAL PARAMETERS

Items	Technical parameters
Rated insulation voltage (Ui)	1250V
Rated operational voltage (Ue)	DC(1P):15V,24V,48V,60V,100V,180V,250V; DC(2P):24V,48V,125V,375V,500V,550V,600V,800V DC(3P):750V,900V;DC(4P):1000V,1200V
Frame rated current	63A
Different current of the same frame (In)	6A、10A、16A、20A、25A、32A、40A、50A、63A
Number of poles	1P、2P、3P、4P
Rated service short-circuit breaking capacity (Ics)	6kA (2P 800V 4P1200V) 2kA
Rated ultimate short-circuit breaking capacity (Icu)	6kA (2P 800V 4P1200V) 2kA
Mechanical life	20000 times
Electrical life	10000 times (≤DC125V/1P, ≤ DC250V/2P),1500 times (other voltage specifications)
Certificate	CE, IEC, CB,TUV
Suitable for fishbone connector wiring and wire wiring	Suitable for fishbone connector wiring and wire wiring
Rated impulse withstand voltage (Uimp)	6kV
Tripping characteristics	B/C
Release type	Thermomagnetic
Overvoltage level	III
Pollution degree	3
Protection Degrees	IP40;IP20 for wiring port
Moisture resistance	Class II
Relative humidity	≤95%
Standards compliant	IEC 60947-2 GB/T14048.2
Shock resistance	According to IEC60068-2-6
Anti-mechanical shock parameters	According to IEC60068-2-27
Operating ambient temperature	-30℃~70℃
Heat & humidity resistant(IEC 60068-4)	Db type (temperature 55℃, 6 cycles)
Storage ambient temperature	-40℃~85℃
Installation method	DIN
Altitude	≤2000m
Weight	0.12kg/P
Accessories	OF/SD/MX/MN/MX+OF
MX control voltage Us	DC: 12V, 24V, 220V; AC: 110V, 220V, 3380V power supply recommended not less than 75W
MN rated voltage Un	AC220V

TRIPPING CHARACTERISTICS

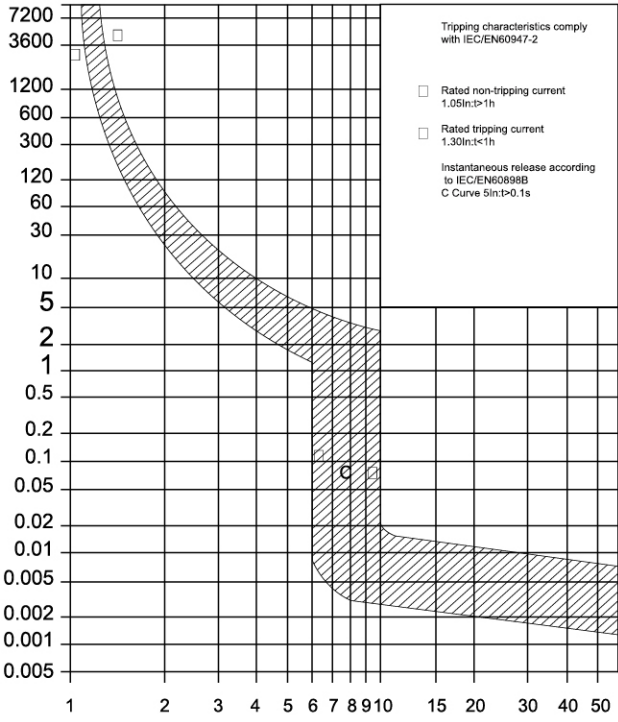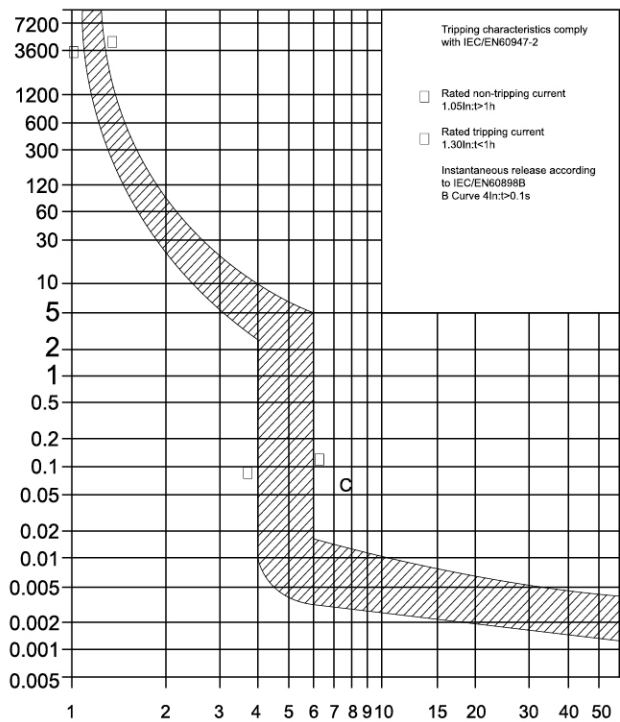

PRODUCT POWER CONSUMPTION

NO.	Specification (A)	Power (W)				<g id="Bold">Remarks</g>
		1P	2P	3P	4P	
1	6	0.45	0.72	0.99	1.44	-
2	10	1.15	1.7	2.25	3.4	-
3	16	1.66	2.67	3.68	5.34	-
4	20	1.76	2.78	3.8	5.56	-
5	25	2.5	3.88	5.25	7.75	-
6	32	2.88	4.16	5.44	8.32	-
7	40	4.32	6.24	8.16	12.48	-
8	50	3.65	6.2	8.75	12.4	-
9	63	5.04	8.19	11.34	16.38	-

WIRING METHOD

