



RT6G-120M

36 Cells

Mono-crystalline

10W

Power output

16.0%

The Highest Efficiency

0~+5W

Tolerance

WWW.RESTARSOLAR.COM

RT66G-120M is a robust solar module with 36 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Restar solar's modules meet the highest quality standards possible.



High module conversion efficiency (up to 16.0%), through superior manufacturing technology



Guaranteed 0~+5W positive power output tolerance ensures high reliability




Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust




Excellent performance under low light environments (mornings, evenings and cloudy days)



Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)

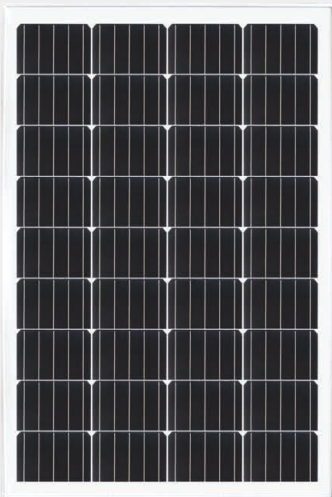

0.5% Annual Degradation over 30 years

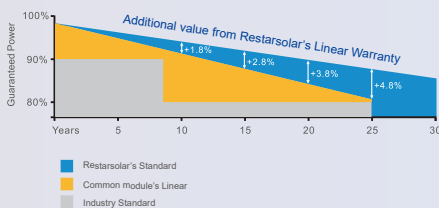

Full range of products and certification systems



ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716



LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 30 year Linear Power Warranty

Dimension of PV Modules Unit: mm

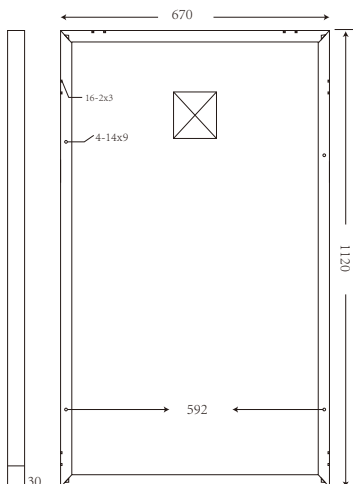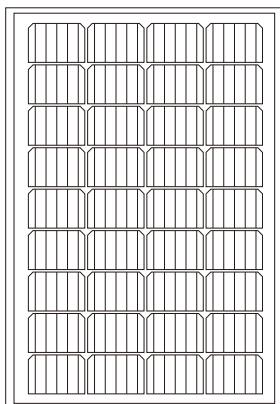

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	120W
Open Circuit Voltage-Voc(V)	22.5V
Short Circuit Current-Isc(A)	6.88A
Maximum Power Voltage-Vmp(V)	18.72V
Maximum Power Current-Imp(A)	6.41A

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

MECHANICAL DATA

Solar cells	Mono-crystalline 156x91mm, 4 or 5 Bus bars
Cell configuration	36 cells(4x9)
Module dimensions	1120x670x30mm
Weight	7.5KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP65 or IP67, 6 Diodes
Cable	4mm ² (IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	2pcs/carton box


TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1000V(IEC)/600V(UL)
Max Series Fuse Rating	15A

PACKAGING CONFIGURATION

	40HQ
Number of modules per container	2500pcs
Package	2pcs/ctn
Package Number	1250cartons
Package Weight	15kg/carton
Package Dimension	1130*700*70mm/carton

I-V characteristics at different irradiancies

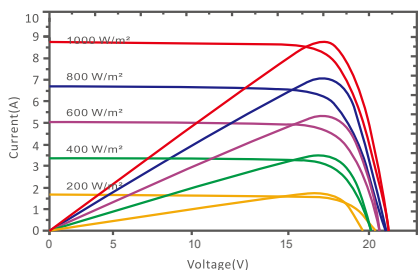

I-V characteristics at different temperature

